

(12) **UK Patent Application** (19) **GB** (11) **2 375 603** (13) **A**

(43) Date of A Publication 20.11.2002

(21) Application No 0112031.0

(22) Date of Filing 17.05.2001

(71) Applicant(s)

JenAct Limited
(Incorporated in the United Kingdom)
9/10 Ardglan Industrial Estate,
WHITCHURCH, Hampshire, RG28 7BB,
United Kingdom

(72) Inventor(s)

Richard Anthony Rudd Little
David Briggs

(74) Agent and/or Address for Service

Sommerville & Rushton
45 Grosvenor Road, ST ALBANS, Herts.,
AL1 3AW, United Kingdom

(51) INT CL⁷**H05B 39/04, G01J 3/28**

(52) UK CL (Edition T)

G1A AA1 AA6 AG15 AG17 AG6 AG8 AHDL AR7
H1D DBT4 D12A D12B1 D12B13Y D12C D35 D5S D9CY
D9C2

(56) Documents Cited

US 5434419 A

(58) Field of Search

UK CL (Edition T) G1A AHDA AHDF AHDL AHDR
AHDT AHDW AHDL AHEP AHER AHET
INT CL⁷ G01J 1/42 3/28, G05D 25/02, H01J 65/04, H05B
39/04


Online databases: WPI, EPODOC, JAPIO


(54) Abstract Title

Microwavable controllable UV light source

(57) A UV light source is controlled, particularly for optimising UVC emissions therefrom, according to the spectral content of the output radiation, the control being either of the energy input to the light source or of the heat extracted from around the light source. In particular, the spectral power distribution is measured as the ratio of power density in the UVC spectrum to that in another portion of the UV spectrum or in the whole spectrum.

UVC output is said to be optimised when the source is operated at a power below the 'knee efficiency', ie where the UVC output changes suddenly from 33% of input power to 6% of input power.

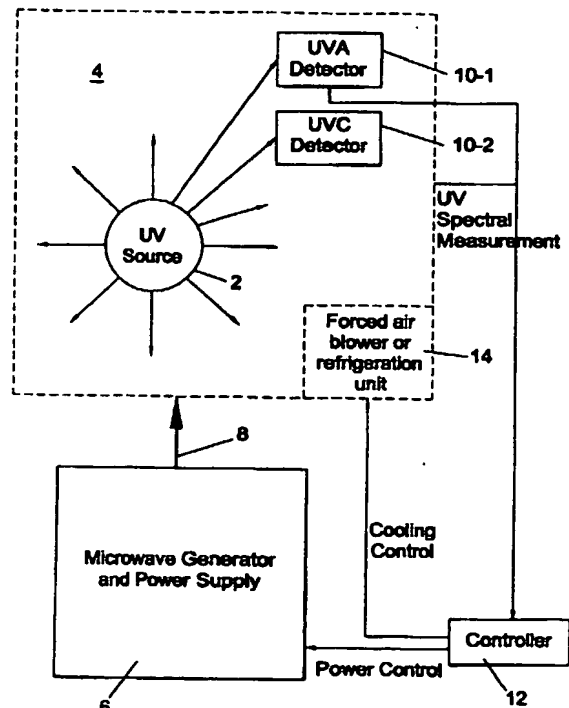**Fig. 2**

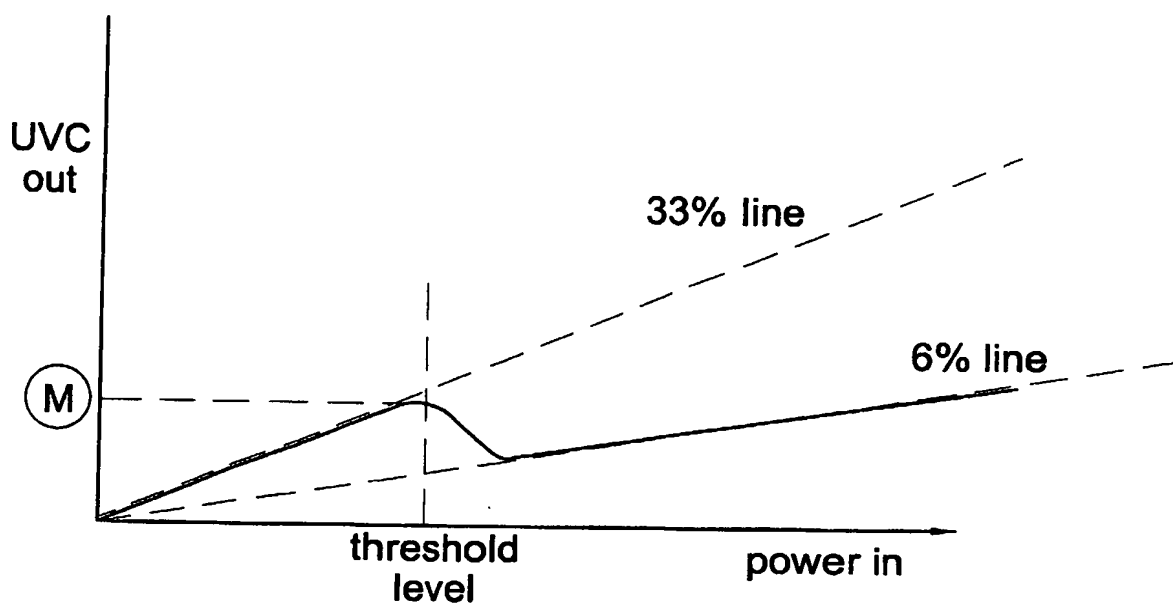

(M) = maximum low pressure UV output level

Fig. 1

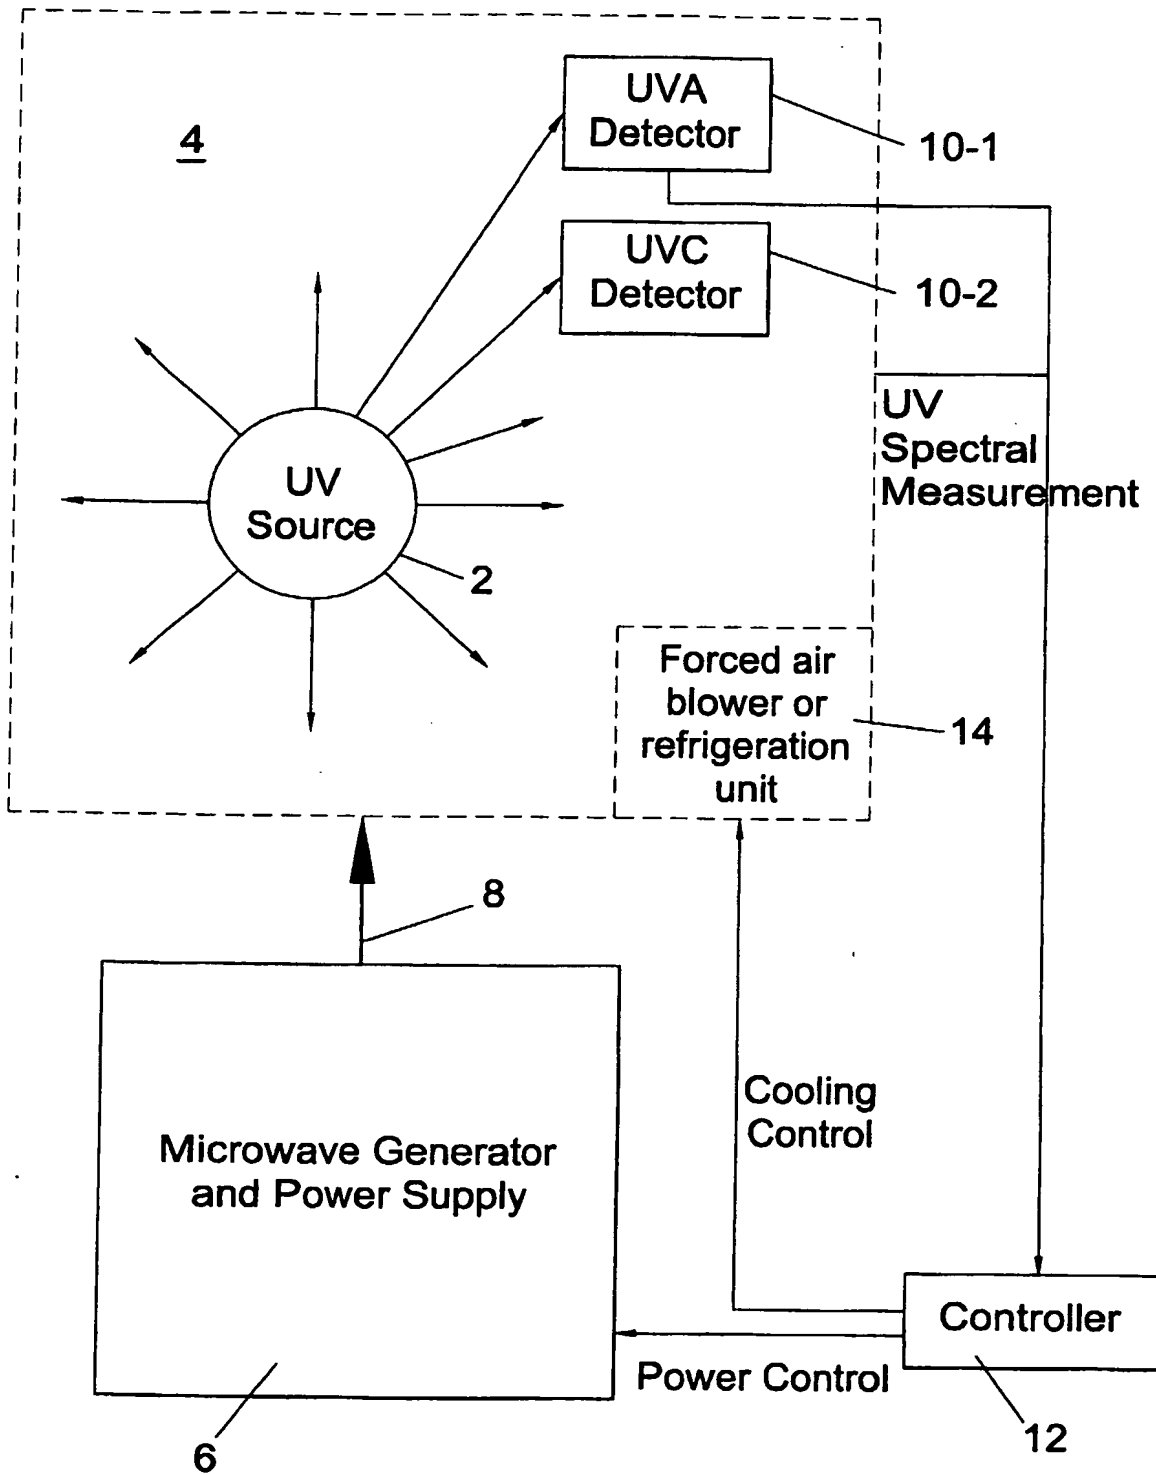


Fig. 2

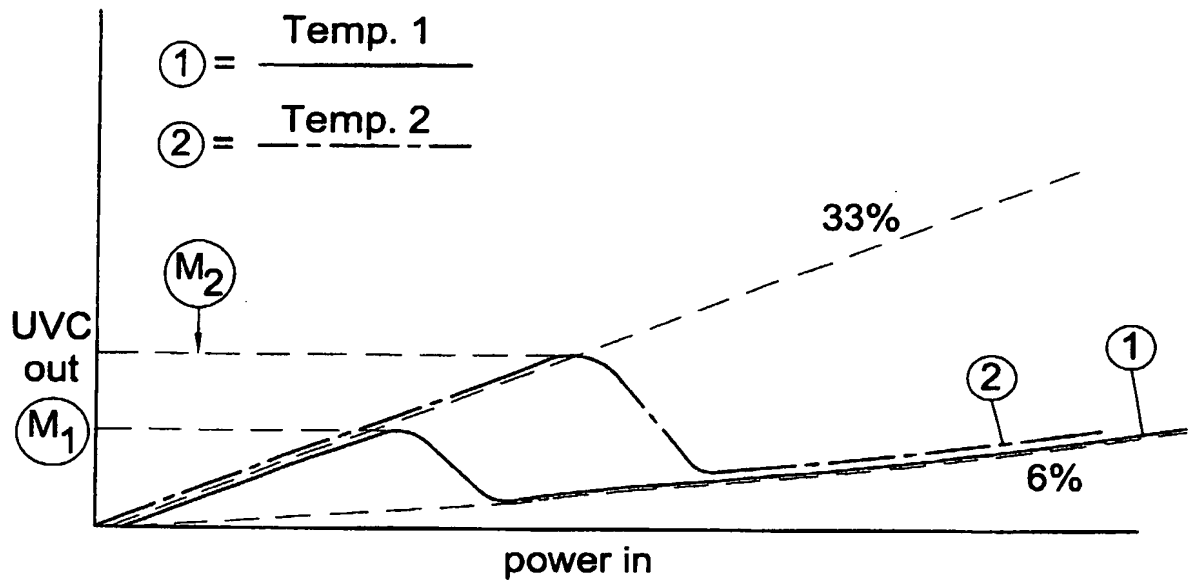


Fig. 3

CONTROL SYSTEM FOR MICROWAVE POWERED ULTRAVIOLET LIGHT**SOURCES**

This invention relates to a control system for an ultraviolet light source, to a method of
5 controlling a microwave energisable ultraviolet bulb and to apparatus for emitting
ultraviolet radiation.

It is known that microwave-induced plasmas using a mixture of mercury mixed with
elements such as iron, gallium, lead and in an inert gas, such as Ar, produce light, a
10 large proportion of which is in the UV spectrum (320-445nm).

Such a plasma may be contained in a transparent envelope which in practice is usually
made from quartz. Striking of the plasma is made easier by evacuating the envelope
and maintaining it at a lower pressure than atmospheric pressure (typically 10mbar)
15 prior to the plasma being struck. . Once struck, energy is absorbed by the plasma and
UV radiation is emitted via the UV-transparent quartz envelope.

Various methods of coupling the microwave energy to the plasma are known. For
example, the bulb may be placed in a resonant cavity or be directly coupled to a
20 microwave source using a transmission line such as a co-axial cable, or waveguide.
Sometimes the addition of a tungsten or similar wire in the bulb envelope is used to aid
striking.

Different UV lamp systems are currently available. Low power systems (typically up to
25 167 w/m rf input @ 20mm envelope diameter) produce a "low pressure" spectral
output, with peak output at UVC wavelengths (typically 254 nm). Medium pressure

systems (typically 6.67kw/m @ 20mm dia) produce a "medium pressure" spectral output with peak output at UVA wavelengths (typically 365 nm).

Hitherto, it has usually been difficult to predict the power densities of different wavelengths of ultraviolet radiation from microwave energised bulbs based on the input power levels because of wide variations in RF coupling into the bulb and because of differing bulb dimensions. This is a significant problem in applications where particular portions of the UV spectrum (commonly designated UVA, UVB, UVC and UVV) are desired to be emitted in particular power levels. For example in curing or germicidal applications, particular energy levels (often expressed as joules per square centimetre) of radiation need to be applied to an article. This has conventionally been carried out by making power measurements and then assuming that these measurements will hold good throughout the duration of bulb operation. With a known power level, the exposure or energy per unit area may be controlled by controlling the duration of exposure.

However a significant limitation of this approach is that in practice, the power output of the bulb varies over time.

In accordance with the invention there is provided a control system for an ultraviolet light source comprising a controller having spectral input means arranged to receive an input signal representative of the spectral power distribution of an ultraviolet light source, and control output means arranged to cause an adjustment in the energy input into the ultraviolet light source and/or to cause a change in the heat energy extracted from the ultraviolet light source responsive to the signal received at the spectral input means.

In another aspect of the invention there is provided a control a system of the type defined in the preceding paragraph in which the controller is arranged to cause a reduction in the energy input into the ultraviolet light source and/or to cause an increase in the heat energy extracted from the ultraviolet light source when the signal
5 received at the spectral input means indicates a ratio of power in the UVC spectrum against the power of another predetermined portion of the UV spectrum or the whole of the UV spectrum which is below a predetermined threshold.

In a method aspect, the invention provides a method of controlling a microwave
10 energised ultraviolet bulb comprising periodically measuring the spectral power density of the bulb output, deriving a measure of the power density in a first predetermined portion of the UV spectrum relative to the power density of a second predetermined portion of the UV spectrum which is overlapping or non-overlapping with the first portion, and controlling the bulb temperature by adjusting the RF output power of a
15 microwave source coupled to the bulb and/or adjusting the thermal energy extracted from the bulb responsive to the derived measure, whereby the UV output of the bulb as a function of microwave energy input is optimised.

In a further apparatus aspect there is provided apparatus for emitting ultraviolet
20 radiation comprising a source of microwave energy, a microwave energised ultraviolet bulb coupled to the microwave source, an ultraviolet transducer arranged to measure the spectral power density of ultraviolet light output by the bulb and a controller arranged to receive the output of the ultraviolet transducer, to analyse the power density of a first part of the output spectrum of the bulb relative to a second overlapping
25 or non-overlapping of the part of the output spectrum of the bulb and to adjust the temperature of the bulb responsive to the relative power densities of the first and second portions of the bulb output spectrum.

As will be explained below, by monitoring the proportions, for example, of UVA and UVC emitted by a UV bulb, it is possible to operate the bulb at optimum efficiency.

- 5 Embodiments of methods and control systems in accordance with the invention will now be described by way of example with reference to the drawings in which :-

Figure 1 is a plot showing UVC power out against rf power in for a typical mercury filled UV bulb;

10

Figure 2 is schematic block diagram of a control system in accordance with the invention; and

- 15 Figure 3 is a plot showing the improvement produced by methods and apparatus in accordance with the invention.

The Applicant has developed variable power supplies which permit variable power levels of microwave energy to be produced at 2.45 Ghz. These power supplies have an adjustable power range enabling variation from typical "low pressure" power intensities to "medium pressure" power intensities.

20

Using the variable power supplies, the Applicant has established that if a (say 150mm x 15mm) mercury bulb is energised by microwave energy with the application of 30 watts rf power, a typical "low UV pressure" spectrum is emitted. If power is gradually increased to 1000 watts, the spectral output changes to a typical "medium pressure" UV spectrum.

25

It has been established by the Applicant that at "low pressure", more (typically 33%) of input energy is converted to UVC and that at "medium pressure", (typically 6-8%) of input energy is converted to UVC. UVC is necessary if using UV light in germicidal applications and thus in germicidal applications, maximising UVC output in relation to input power is desirable to maximise efficiency.

The Applicant has noted that the infrared heat emissions from medium pressure lamps are far higher than from low pressure lamps. For example the surface temperature of a 150mm x 15mm bulb at 30 watts of rf power is approximately 60°C whereas at the surface of the same bulb at 1000 watts of rf input power, it is approximately 500°C+.

For many germicidal applications, such as disinfection of bottles, temperature control is important and thus it is desirable to minimise infrared emission as well as to maximise UVC emission.

15

The Applicant's research has shown that if the rf power input to a microwave powered UV lamp is increased gradually, there is not, as expected, a proportional change from low pressure characteristics to medium pressure characteristics. There is in fact a sudden change at a "threshold level". Once a certain "activation energy" is reached, pressure rises considerably and IR, visible light and UVA rise very quickly as UVC output falls quickly.

Thus with reference to Figure 1, there is a "knee" at a particular power input level at which the UVC output transfers from the line representing 33% of input power to the line representing 6% of input power. By operating the lamp at the left side of this "knee" efficiency of UVC output is maximised. Conversely, if it is desired to maximise

25

output at other portions of the UV spectrum then the lamp is operated at higher power levels to the right of the "knee" in the Figure.

Thus with reference to the schematic block diagram of Figure 2, a UV source (typically a mercury filled quartz bulb) 2 is placed in a resonant microwave cavity 4. A microwave source such as a magnetron 6 is coupled to the resonant cavity 4 via a waveguide 8.

Alternatively, the microwave generator 6 may be directly coupled to the UV source 2 using a waveguide or a co-axial transmission line for example.

Detectors 10-1 and 10-2 are placed in line of sight of the UV source and are arranged to detect portions of the spectrum (typically UVA and UVC) which are emitted by the UV source. Their outputs (which are representative of power density) are fed into a controller 12.

The controller 12 is operable to monitor the relative magnitudes of the outputs of the detectors 10-1 and 10-2 and to provide control outputs responsive to those inputs.

Considering the graph of Figure 1, it will be noted that one of the controllable variables to adjust the operating position of the bulb on the curve of the figure is the input power. Thus one possible control output is to vary the rf energy input to the bulb. This may be achieved, for example, using a variable current and/or voltage power supply for a magnetron in order to vary the rf output of the magnetron. Thus the outputs of the detectors 10-1 and 10-2 preferably form part of a feedback loop via the controller to the microwave generator and power supply 6. Thus if the detectors are configured, for example, to monitor the UVC and UVA portions of the spectrum, the ratio of UVA to

UVC will generally be about 5 to 100% or less (i.e. proportionally more UVC) according to the Applicant's research, when the bulb is operating on the left side of the "knee" of the curve shown in Figure 1. Thus in order to provide efficient UVC emission, the rf input power provided by the microwave generator 6 should be reduced when the
5 proportion of UVC to UVA power detected by the detectors reduces below a threshold such as 4:1. The ratio of 4:1 seems to hold true for the bulbs tested but the invention is not limited to this ratio.

It will be understood by those skilled in the art that appropriate control systems
10 techniques such as built-in hysteresis should be applied to the feedback loop to prevent unnecessary oscillations. However, the general principle of maintaining the proportion of UVC to UVA at or just below 4:1 does in this innovative arrangement, maximise the efficiency of UVC output relative to input power.

15 Conversely, if it is desired to maximise UVA output (for example in UV curing applications) then the rf input power is controlled to be increased until the proportion of UVC falls to approximately 6-8% of that of UVA. Since according to the Applicant's research, some of the reduction in UVC output is as a result of a spectral shift to UVA, it will be appreciated that UVA output is maximised by operating along the 6% line of
20 the graph of Figure 1. However, it has also been found by the Applicant that heat emissions are increased when operating in this region. Thus a further control schema may be to monitor infrared emissions in conjunction with UV emissions.

It has also, surprisingly, been found by the Applicants that cooling of the bulb causes a
25 shift in the position of the "knee". Thus with reference to Figure 3, which shows two plots of UVC power out versus rf power in for two different bulb temperatures it will be noted that the maximum UVC power which may be produced by the bulb is increased.

Thus by providing increased cooling of the bulb (as denoted by the dotted line on the graph marked Temp.2) more power may be put into the bulb before the UVC output moves past the "knee" down on to the 6% line.

5

Therefore as a further control schema, the controller 12 may additionally or alternatively increase cooling of the bulb in response to a fall of the UVC output below the 4:1 proportion of UVA output. This may be achieved, for example, by using forced air cooling and/or refrigerated air. Alternatively, cooling may be reduced in order to
10 optimise UVA output as discussed above.

Thus it will be appreciated that the problems of the prior art have been neatly removed using a self-adjusting feed-back control loop. Efficiency is optimised and furthermore as a side effect, the temperature of the bulb can be controlled since as noted above,
15 operation on the 33% line of the curve results in greatly reduced infrared emissions relative to operation on the 6% line.

Thus although the Applicant's research has shown that contrary to the expected result, increased input power into the bulb beyond a certain operating point, results in reduced
20 output power in certain spectral bands, this unexpected result has been turned by the Applicant into an advantage since it provides a useful control threshold point for the Applicant's new feedback control apparatus.

Thus in summary, the Applicant's have through diligent efforts found that there are four
25 variable factors in microwave energised ultraviolet bulbs which affect ultraviolet spectral output and output efficiency. These four factors are the initial fill pressure of the bulb, the volume of the bulb, the temperature of the bulb during operation and the

power supplied and coupled into the bulb. Presently, such microwave energisable bulbs are produced using a rigid envelope of quartz. Thus the initial fill pressure and volume of the bulb are generally fixed after manufacture of the bulb. Thus the Applicant's invention concentrates on controlling the other two variables i.e. the

5 temperature of the bulb and the power supplied and coupled into the bulb in response to a shift in the output spectrum. The threshold of UVC to UVA output power having a 4:1 value (as described above) is effective but may be varied. Furthermore, an absolute threshold of UVC or UVA, for example, may be used above rather than using a relative measurement such as UVA power relative to UVC power.

10

With further advances in bulb technology, it will be appreciated that if the other identified variables can be adjusted in operation then these also could be controlled by the controller 12.

15 It will be appreciated that cooling of the bulb may be carried out using forced air cooling or refrigeration as described above or using any other fluid such as water or gases other than air.

Suitable sensors for forming the detectors 10-1 and 10-2 are produced by EIT Inc.,

20 Virginia, USA such as their "compact sensor" range which are sold with filters to provide voltage outputs responsive to radiation in the UVA (320-390nm) UVB (280-320nm), UVC (250-260nm), and UVV (395-445nm) operational ranges. The controller 12 may for example be implemented using a micro-controller or a suitably equipped PC.

25

There now follows examples of applications of the invention.

Example 1

UV bulb is rf energised and used to disinfect an air conditioning system or air duct where air flow is variable, or air temperature is variable (use, demand, climate etc.).

- 5 Ducting forms rf resonant or non-resonant cavity and bulb is placed within cavity. Cavity also contains UVA and UVC sensors.

If UVA sensor registers more than $\frac{1}{4}$ of UVC reading, either

- power supply reduces
- 10 - chiller turns on to further cool air
- air flow is increased etc.

These actions can happen simultaneously or be prioritised and work sequentially.

15 Example 2

- In a packaging machine in an environment where internal factory temperature changes due to season or to other factors and lamp cooling is not possible, UV lamps will be turned on at reduced (say 20%) power and then power is increased until UVA rises to a
- 20 maximum % of UVC. Power will then rise/fall to maintain this level.

Other examples

- a) Water disinfection where water temperature varies.
- 25 b) UVC propagation or enhancement of chemical reaction where reaction temperature varies (possibly as a result of UVC activation).

- c) UV curing reaction where 365nm UVA output has to be maintained by high temperature (i.e. operate to right of "knee" in Figure 1).

CLAIMS

1. A control system for a microwave energiseable ultraviolet light source comprising a controller having spectral input means arranged to receive an input signal representative of the spectral power distribution of an ultraviolet light source, and control output means arranged to cause an adjustment in the energy input into the ultraviolet light source and/or to cause a change in the heat energy extracted from the ultraviolet light source responsive to the signal received at the spectral input means.
2. A control system according to claim 1, wherein the controller is arranged to interpret an input signal which represents a ratio of the power of a predetermined portion of the UV spectrum against the power of another predetermined portion of the UV spectrum or the whole of the UV spectrum.
3. A control system according to claim 2, wherein the controller is arranged to interpret an input signal which represents the ratio of power in the UVC spectrum against the power of another predetermined portion of the UV spectrum or the whole of the UV spectrum.
4. A control a system according to any preceding claim, wherein the controller is arranged to cause a reduction in the energy input into the ultraviolet light source and/or to cause an increase in the heat energy extracted from the ultraviolet light source when the signal received at the spectral input means indicates a ratio of power in the UVC spectrum against the power of another predetermined portion of the UV spectrum or the whole of the UV spectrum which is below a predetermined threshold.

5. A control system according to claim 4, wherein the predetermined threshold is in the range 5% to 30%, preferably in the range 10% to 27% and more preferably in the range 24% to 26%.
- 5 6. A method of controlling a microwave energisable ultraviolet bulb comprising periodically measuring the spectral power density of the bulb output, deriving a measure of the power density in a first predetermined portion of the UV spectrum relative to the power density of a second predetermined portion of the UV spectrum which is overlapping or non-overlapping with the first portion, and
10 controlling the bulb temperature by adjusting the RF output power of a microwave source coupled to the bulb and/or adjusting the thermal energy extracted from the bulb responsive to the derived measure, whereby the UV output of the bulb as a function of microwave energy input is optimised.
- 15 7. A method according to claim 6, wherein the first predetermined portion of the UV spectrum has wavelengths generally in the range 250nm to 260nm.
8. A method according to claim 6 or claim 7, wherein the second predetermined portion of the UV spectrum has wavelengths generally in the range 320nm to
20 390nm.
9. A method according to claim 6 or claim 7, wherein the derived measure is derived by calculating a ratio of the power density of the first and second
25 predetermined portions.

10. A method according to claim 8 wherein the bulb temperature is controlled by reducing the RF output power of a microwave source coupled to the bulb and/or increasing the thermal energy extracted from the bulb as the ratio decreases in value.
- 5
11. A method according to any of claims 6 to 9 wherein the thermal energy extracted from the bulb is adjusted by adjusting the air flow around the bulb and/or adjusting the temperature of fluid, such as air, which is adjacent the bulb.
- 10
12. Apparatus for emitting ultraviolet radiation comprising a source of microwave energy, a microwave energised ultraviolet bulb coupled to the microwave source, an ultraviolet transducer arranged to measure the spectral power density of ultraviolet light output by the bulb and a controller arranged to receive the output of the ultraviolet transducer, to analyse the power density of a first part of the output spectrum of the bulb relative to a second overlapping or non-overlapping part of the output spectrum of the bulb and to adjust the temperature of the bulb responsive to the relative power densities of the first and second portions of the bulb output spectrum.
- 15
- 20
13. Apparatus according to claim 11, wherein the temperature of the bulb is adjusted by adjusting the output power of the microwave source.
14. Apparatus according to claim 11, wherein the temperature of the bulb is adjusted by adjusting the thermal energy extracted from the bulb.
- 25

15. Apparatus according to claim 12, wherein the thermal energy extracted from the bulb is adjusted by adjusting the flow of a fluid such as air, past the bulb.
16. Apparatus according to claim 11 or claim 12, wherein the thermal energy
5 extracted from the bulb is adjusted by adjusting the temperature of a fluid such as air, adjacent the bulb.
17. A control system according to any preceding claim, wherein the controller is
10 arranged to cause a reduction in the energy input into the ultraviolet light source and/or to cause an increase in the heat energy extracted from the ultraviolet light source when the signal received at the spectral input means indicates a rise or fall in the power of a predetermined portion of the UV spectrum above or below, respectively, a predetermined power threshold.
18. A method of optimising the efficiency of UVC emissions from a microwave
15 energisable ultraviolet bulb comprising periodically measuring the proportion of UVC power emissions relative to the power of emissions in another overlapping or non-overlapping portion of the UV spectrum such as the UVA spectrum, and adjusting the temperature of and/or microwave power input to the bulb to
20 maintain the said proportion above or below a predetermined threshold value.
19. A control system constructed and arranged as described herein with reference to the drawings.
20. A method of controlling an UV light source as described herein with reference
25 to the drawings.



16



INVESTOR IN PEOPLE

Application No: GB 0112031.0
Claims searched: 1, 6, 12, 18

Examiner: Sue Willcox
Date of search: 26 February 2002

Patents Act 1977
Search Report under Section 17

Databases searched:

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:
UK Cl (Ed.T): G1A(AHDT, AHDA, AHDW, AHDF, AHDL, AHDR, AHEP, AHET, AHEL, AHER)
Int Cl (Ed.7): G01J(1/42, 3/28); G05D(25/02); H01J(65/04); H05B(39/04)
Other: Online databases: WPI, EPODOC, JAPIO

Documents considered to be relevant:

Category	Identity of document and relevant passage	Relevant to claims
X	US 5434419 DECUPPER - see particularly the abstract and column 5, lines 51 - 57	1, 2, at least

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.